


**Power Relay K (Open – Sealed)**

- Limiting continuous current 45A
- Wide voltage range
- 24VDC coil versions available
- For high current version refer to Power Relay K-S

Typical applications

ABS control, blower fans, car alarm, cooling fan, engine control, fuel pump, hazard warning signal, heated front screen, heated rear screen, ignition, lamps front/rear/fog light, interior lights, main switch/supply relay, seat control, seatbelt pretensioner, sun roof, turn signal, valves, window lifter, wiper control.

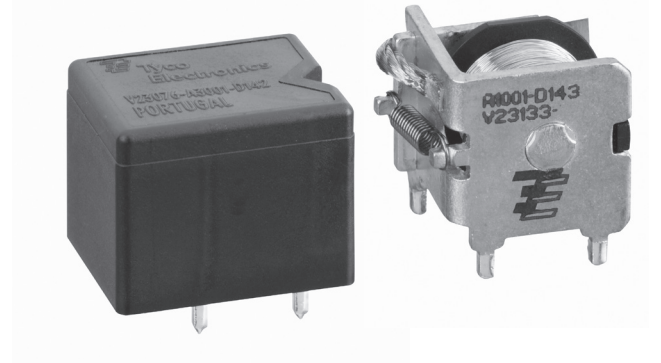


**Contact Data**

Typical applications	Resistive/inductive loads	Resistive/inductive loads	Indicator lamps	Headlights, capacitive loads	Headlights capacitive loads
Contact arrangement	1 form A, 1 NO	1 form C, 1 CO	1 form A, 1 NO	1 form A, 1 NO	1 form C, 1 CO
Rated voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Rated current	45A	A/B (NO/NC) 45/30A	30A	40A	A/B (NO/NC) 40/25A
Limiting continuous current					
23°C	45A	45/30A	30A	40A	40/25A
85°C	30A	30/25A	25A	25A	25/20A
Limiting making current <sup>1)</sup>	100A	100/30A	120A <sup>3)</sup>	180A	180/60A
Limiting breaking current <sup>2)</sup>	60A	60/30A	60A	60A	60/30A
Contact material	AgNi0.15	AgNi0.15	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Min. recommended contact load		1A at 5VDC <sup>4)</sup>			
Initial voltage drop, at 10A, typ./max.		20/300mV			
Operate/release time		typ. 5/3ms <sup>5)</sup>			
Electrical endurance	>2x10 <sup>5</sup> ops. at 13.5VDC, 40A	>2x10 <sup>5</sup> ops. at 13.5VDC, 40A	>2.2x10 <sup>6</sup> ops. up to 8x21W	>10 <sup>5</sup> ops. up to 4x60W	>10 <sup>5</sup> ops. up to 4x60W
Mechanical endurance, DC coil		>10 <sup>7</sup> ops.			

- 1) The values apply to a resistive or inductive load with suitable spark suppression and at maximum 13.5VDC for 12VDC or 27VDC for 24VDC load voltages.
- 2) For a load current duration of maximum 3s for a make/break ratio of 1:10.
- 3) Corresponds to a peak inrush current on initial actuation (cold filament).
- 4) See chapter Diagnostics of Relays in our Application Notes or consult the internet at <http://relays.te.com/appnotes/>
- 5) For unsuppressed relay coil. A low resistive suppression device in parallel to the relay coil increases the release time and reduces the lifetime caused by increased erosion and/or higher risk of contact tack welding.

**Max. DC load breaking capacity**

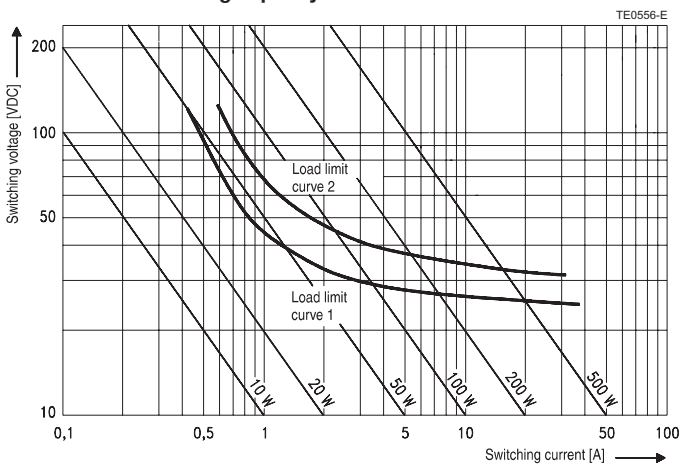

Load limit curve 1: arc extinguishes, during transit time (changeover contact).  
 Load limit curve 2: safe shutdown, no stationary arc (make contact).  
 Load limit curves measured with low inductive resistors verified for 1000 switching events.

NOT the LATEST REVISION

**Power Relay K (Open – Sealed) (Continued)**

**Coil Data**


Rated coil voltage	12VDC / 24VDC
--------------------	---------------

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power W
001	12	6.9	1.2	90	1.6
022	24	14.1	2.4	362	1.6

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coils on request.

**Coil operating range**

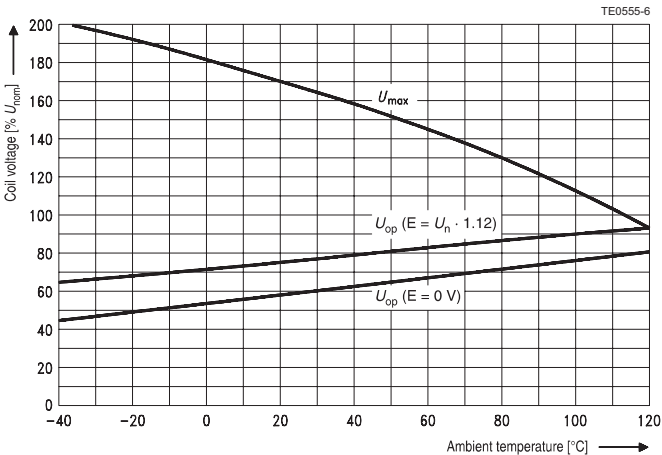

Does not take into account the temperature rise due to the contact current  
E = pre-energization

**Insulation Data**

Initial dielectric strength	
between open contacts	500VAC <sub>rms</sub>
between contact and coil	500VAC <sub>rms</sub>

**Other Data**

EU RoHS/ELV compliance	compliant
Ambient temperature, DC coil	-40 to +105°C <sup>6)</sup>
Climatic cycling with condensation, EN ISO 6988	3 cycles, storage 8/16h
Temperature cycling (shock), IEC 60068-2-14, Na	20 cycles, -40/+85°C (dwell time 1h)
Damp heat cyclic, IEC 60068-2-30, Db, Variant 1	6 cycles, upper air temperature 55°C
Damp heat constant, IEC 60068-2-3, method Ca	56 days, upper air temperature 55°C
Degree of protection, IEC 61810	RT 0/II – open version RT III – immersion cleanable version
Corrosive gas, IEC 60068-2-42	10 days
IEC 60068-2-43	10 days
Vibration resistance (functional), IEC 60068-2-6 (sine pulse form), acceleration, acc. to position	10 to 200Hz, 20 to 40g <sup>7)</sup>
Shock resistance (functional), IEC 60068-2-27 (half sine form single pulses), acceleration, acc. to position	8ms 30g <sup>7)</sup>
Terminal type	PCB
Weight	
sealed version	approx. 22g (0.77oz)
open version	approx. 19g (0.67oz)
Solderability (aging 3: 4h/155°C) for leaded process ( $T_m = 183^\circ\text{C}$ ), for Pb-free process ( $T_m = 217^\circ\text{C}$ ), IEC 60068-2-20	Ta, method 1, hot dip 5s, 215°C according IEC 600688 <sup>8)</sup>
Storage conditions	
Packaging unit	
sealed version	300 pcs.
open version	500 pcs.

6) See coil operating range DC.

7) No change in the switching state >10 $\mu$ s.


8) For general storage and processing recommendations please refer to our Application Notes and especially to Storage in the Definitions or at <http://relays.te.com/appnotes/>

**Terminal Assignment (Open and Sealed Version)**


Bottom view on solder pins

1 form A, 1 NO

1 form C, 1 CO



TE1091-B1




TE1086-A1

\*) Terminal 4 to be bridged


**Power Relay K (Open – Sealed) (Continued)**

**Dimensions**

Power Relay K open version

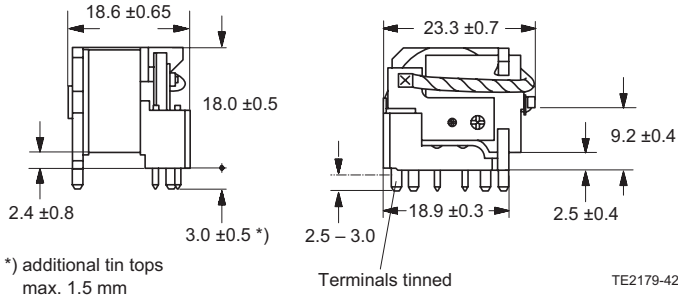


Power Relay K sealed version

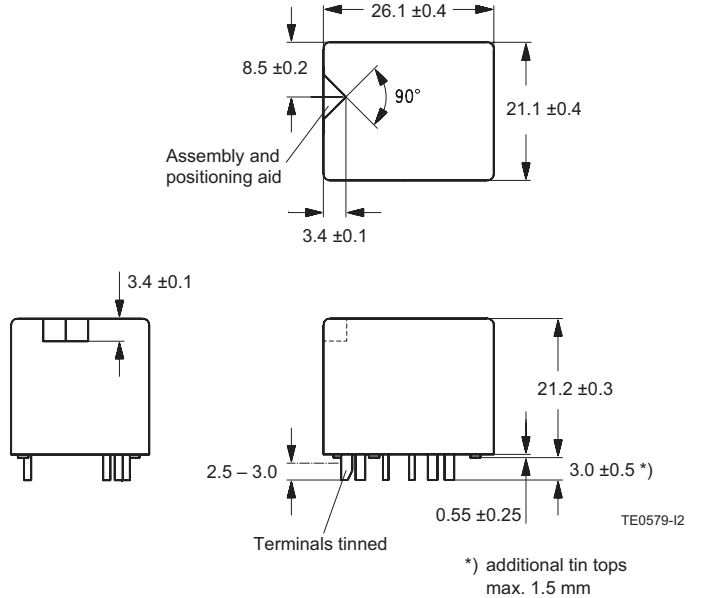


**Mounting Hole Layout**

Bottom view on solder pins

Power Relay K open version

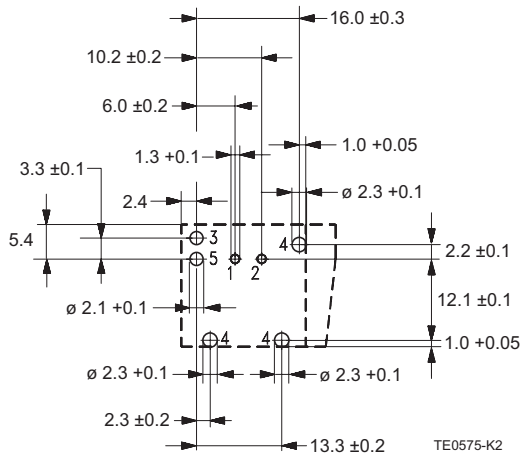

Power Relay K sealed version

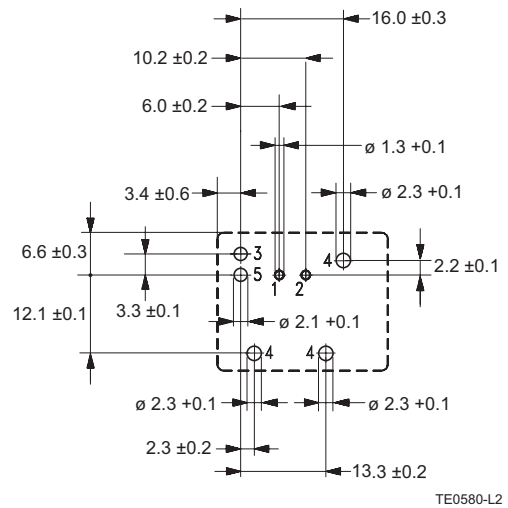

**Power Relay K (Open – Sealed)** (Continued)

**Product code structure**

Typical product code **V23076 -A 1 022 -C 13 3**

<b>Type</b>		<b>V23076</b> Power Relay K, sealed		<b>V23133</b> Power Relay K, open	
<b>Terminal</b>		<b>A</b> PCB			
<b>Design</b>		<b>1</b> Single relay		<b>3</b> Single relay	
<b>Coil</b>		<b>001</b> 12VDC		<b>022</b> 24VDC	
<b>Contact type</b>		<b>C</b> Single contact		<b>D</b> Single contact	
<b>Contact material</b>		<b>13</b> AgNi0.15		<b>14</b> AgSnO <sub>2</sub>	
		<b>15</b> AgSnO <sub>2</sub> (Special)			
<b>Contact arrangement</b>		<b>2</b> 1 form A, 1 NO		<b>3</b> 1 form C, 1 CO	

Product code	Terminal/Encl.	Design	Coil	Contact	Cont. material	Arrangement	Part number		
V23076-A1001-C133	PCB, sealed	Single relay	12VDC	Single	AgNi0.15	1 form C, CO	1393277-4		
V23076-A1001-D143					AgSnO <sub>2</sub>		1393277-6		
V23076-A3001-C132					AgNi0.15		1 form A, NO	1-1393277-4	
V23076-A3001-D142					AgSnO <sub>2</sub>			1-1393277-7	
V23076-A3001-D152 <sup>1)</sup>					AgSnO <sub>2</sub> special		1-1414175-0		
V23076-A1022-C133			24VDC			AgNi0.15	1 form C, CO	1393277-8	
V23076-A1022-D143						AgSnO <sub>2</sub>		1393277-9	
V23076-A3022-C132						AgNi0.15		1 form A, NO	1-1393277-8
V23076-A3022-D142						AgSnO <sub>2</sub>			1-1393277-9
V23133-A1001-C133						PCB, open			12VDC
V23133-A1001-D143	AgSnO <sub>2</sub>	1-1393278-3							
V23133-A3001-C132	AgNi0.15	1 form A, NO	5-1393278-7						
V23133-A3001-D142	AgSnO <sub>2</sub>		5-1393278-9						
V23133-A3001-D152 <sup>1)</sup>	AgSnO <sub>2</sub> special	1-1414173-0							
V23133-A1022-C133	24VDC		AgNi0.15	1 form C, CO	3-1393278-7				
V23133-A1022-D143			AgSnO <sub>2</sub>		3-1393278-9				
V23133-A3022-C132			AgNi0.15		1 form A, NO		7-1393278-1		
V23133-A3022-D142			AgSnO <sub>2</sub>				7-1393278-2		
V23133-A3022-D152 <sup>1)</sup>			AgSnO <sub>2</sub> special		1-1414174-0				

1) For indicator lamps.